

Data Sheet



DC4000U10-120

Directional Coupler
700 MHz-4.0 GHz



Features

- Small Size (2×2mm)
- Very Low Loss
- Excellent directivity
- Broad frequency coverage
- High Isolation
- Low VSWR
- Good Repeatability
- Tape & Reel
- Power handling:4 watts

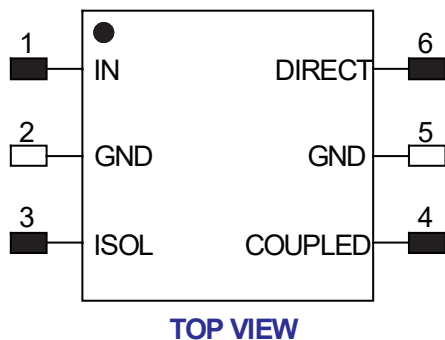


Applications

- Phase shifter / Attenuator
- Balanced amplifier / LNA configurations
- Modulators
- Mixers
- Power combining /dividing

Notes:

1. This part has passed through 100% RF test.
2. Suggest to add Capacitors of DC Blocker between Pins(with black color) and external circuit to prevent DC signal entry to guarantee parts normal work.
3. Suggest to add a TVS Diode in parallel between Eletrode (with black color) and Capacitor of DC Blocker to provide ESD protection for the product. TVS Diode use ON Semiconductor's ESD9101 is recommended.

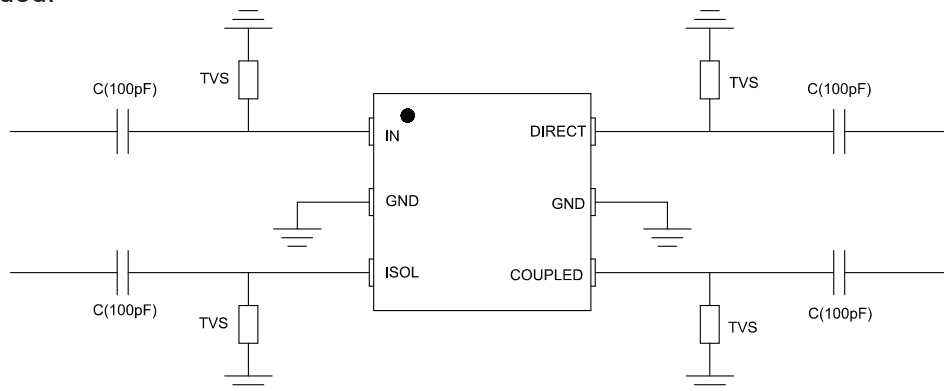

ESD Rating

Human Body Model (HBM): $\leq 650V$ in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): $\leq 50V$ in accordance with ANSI/ESD STM 5.2 - 1999

Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

Rev A4.1

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Data Sheet

DC4000U10-120


Directional Coupler
700 MHz-4.0 GHz



Electrical Specifications at 25° C

Part No.	Freq. Range (MHz) FL~FU	Power (W)	Size LxW (mm)	Coupling (dB)	Insertion loss (dB)	VSWR(:1)	Directivity (dB)
DC4000U10-120	700~850	4	2X2	26.5	0.2	1.10	8.15
	850~960			24.8	0.21	1.10	8.15
	960~1400			23.7	0.22	1.10	8.15
	1400~1700			20.3	0.23	1.15	8.25
	1700~2000			18.8	0.24	1.15	8.55
	2000~2700			17.4	0.27	1.2	8.80
	2700~4000			13.0	0.3	1.2	9.80

Typical Performance (-40°C, 25°C, 85°C: 700-4000 MHz)

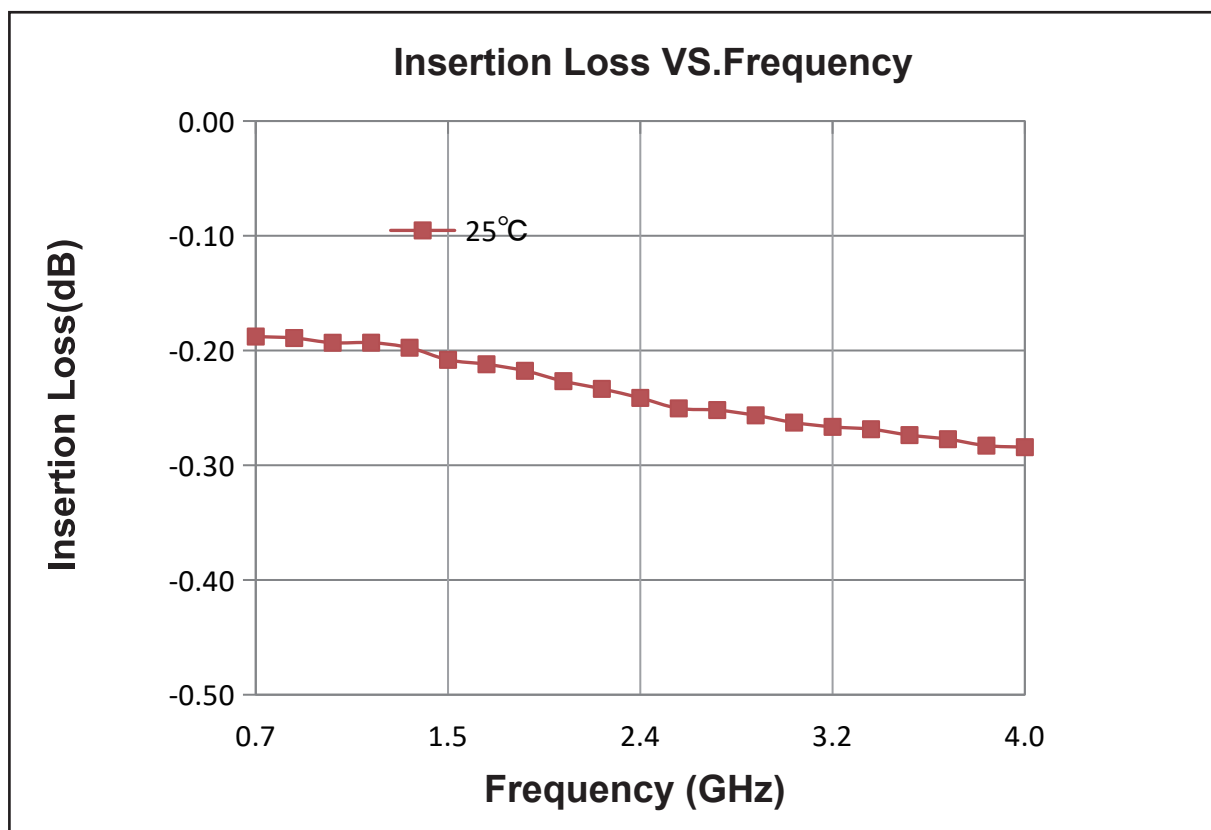

Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533




Rev A4.1

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Data Sheet

DC4000U10-120

Directional Coupler
700 MHz-4.0 GHz

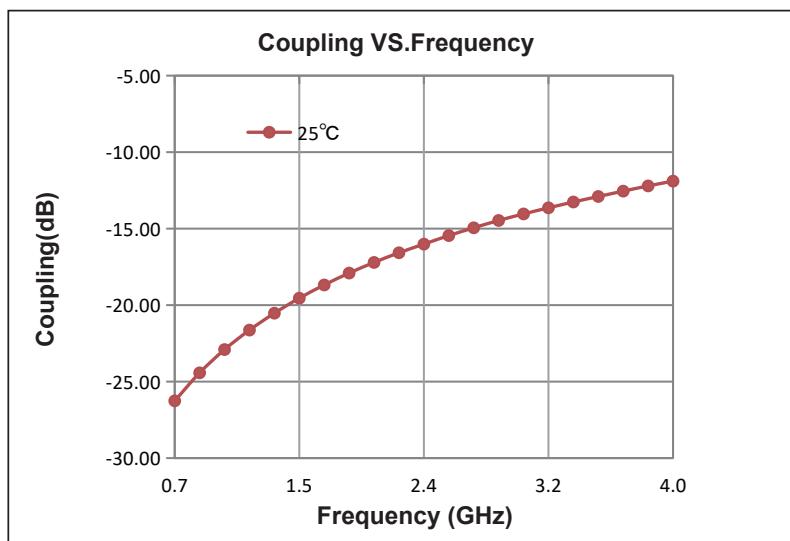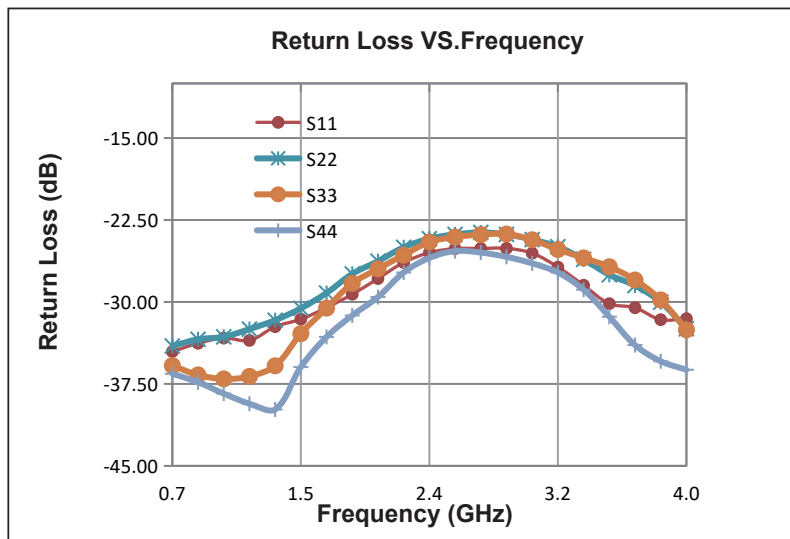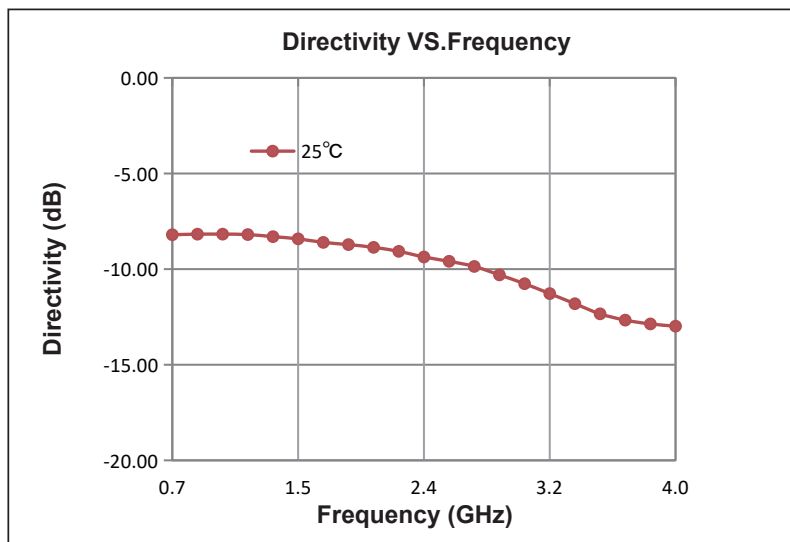

Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

Rev A4.1

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Data Sheet


DC4000U10-120

Directional Coupler


700 MHz-4.0 GHz



Outline Drawing

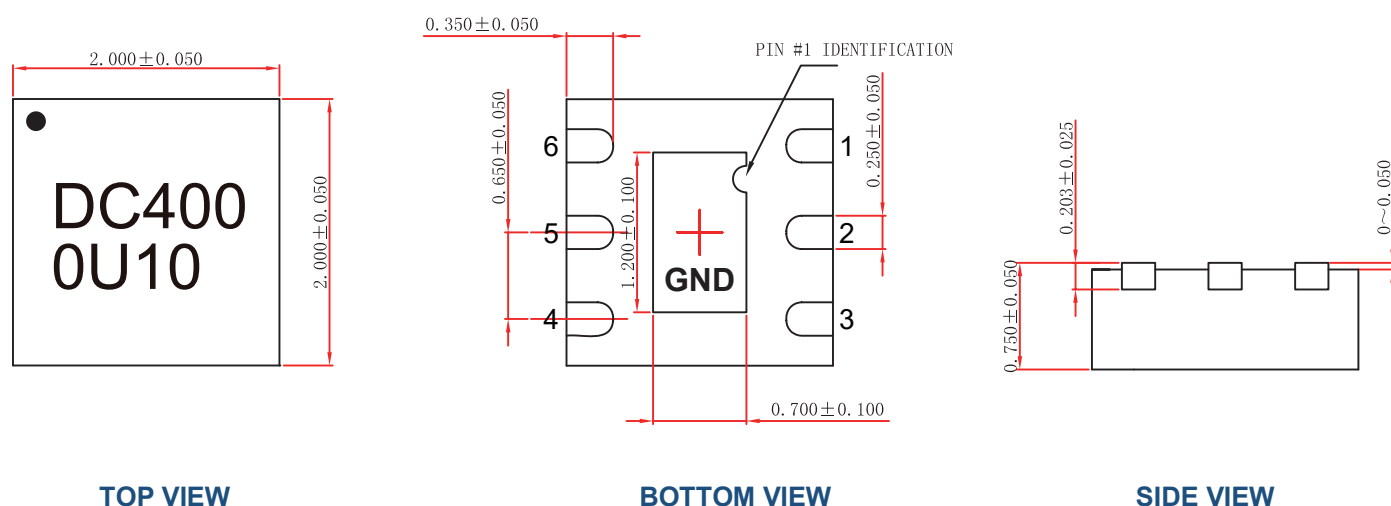

Land Pattern

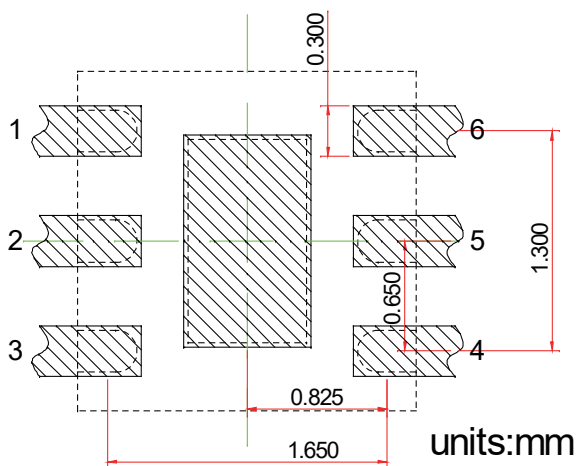


Recommended Land Pattern

Top View

Notes: All dimensions show in millimeters

Pin Out

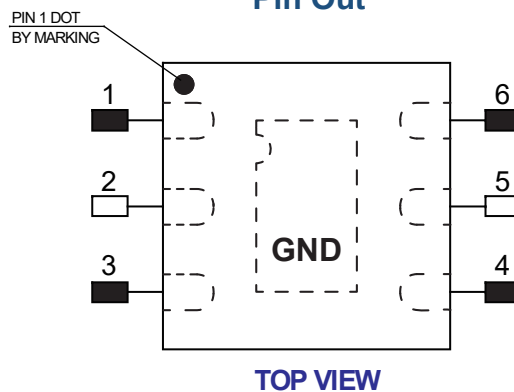

Notes:

1. Require to add Capacitors of DC Blocker between Pins(with black color) and external circuit to prevent DC signal entry to guarantee parts normal work.
2. This part has passed through 100% RF test.

Pin #	Connection
1	IN
2	GND
3	ISOL
4	COUPLED
5	GND
6	DIRECT
Center Pad	GND

Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

Rev A4.1

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com