


Description

The PD19T03 is a low profile, sub-miniature Wilkinson power divider in an easy to use surface mount package. The PD19T03 is ideal for high volume manufacturing and delivers higher performances than traditional printed and lumped element solutions. The PD19T03 is matched to 50 Ω and has a height profile of 0.5 mm which is ideal for high level integrations in the following markets: DVB-S, DVB-H (USA), GSM, DCS, PCS, CDMA, 3G and GPS. The PD19T03 does not include the resistive element and therefore, requires an external resistor for operation. The PD19T03 is available on tape and reel for high volume manufacturing pick and place.



Features:

- 1700-2200 MHz
- High Return Loss
- 0.5mm Height Profile
- 50 Ω Input / 50 Ω Outputs
- Low Insertion Loss
- Surface Mountable
- Tape & Reel
- Non-conductive Surface
- RoHS Compliant
- External resistor required
- Halogen Free


Electrical Specifications

Frequency	Isolation	Insertion Loss	Return LOSS
MHz	dB Min	dB Max	Min (dB) Input/Output
1700-2200	18	0.6	13/18
Amplitude Balance	Phase Balance	Power	Operating Temp.
dB Max	Degrees	Avg. CW Watts at 105°C	°C
± 0.30	± 1.0	2	-55 to +85

Notes:

1. All the above data are based on specified demo board.
2. Insertion loss: Thru board loss has been removed.
3. The part cannot be used near the shielding case.

Mechanical Outline

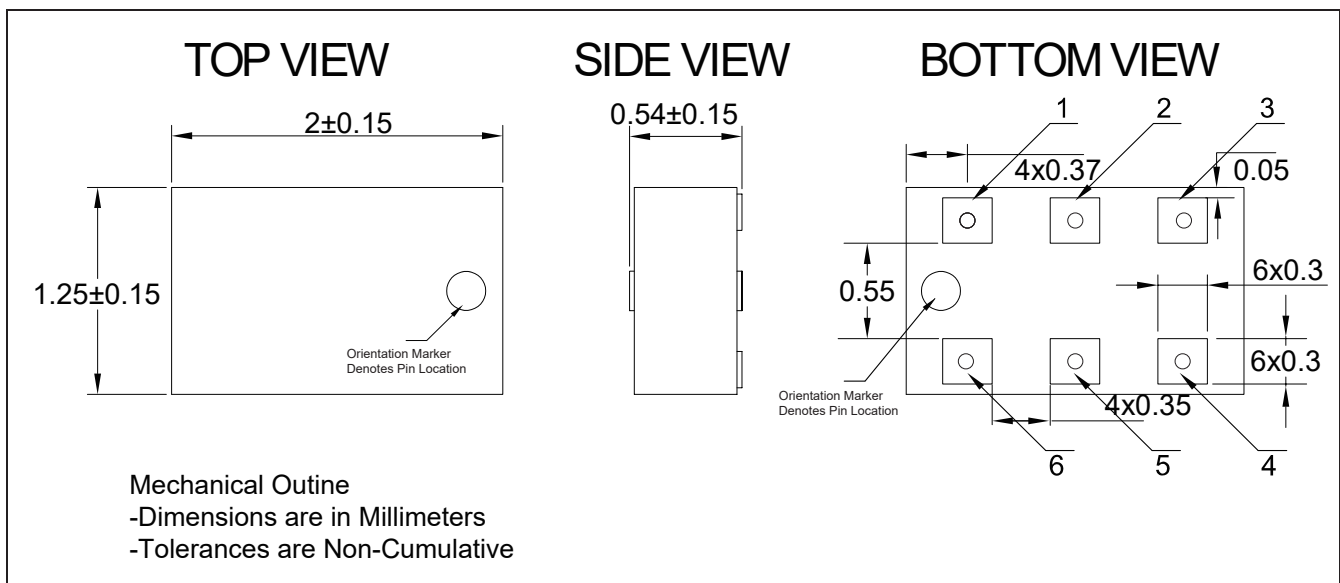

Yantel Corporation


Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Power Divider Pin Configuration

The PD19T03 has an orientation marker to denote Pin1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

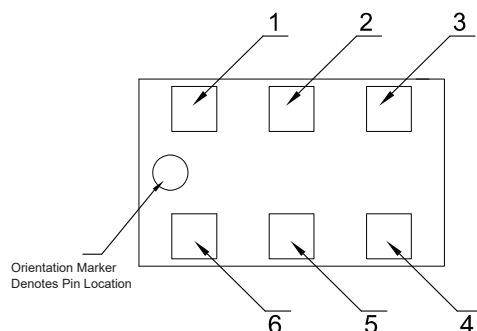

Pin	Designation
1	GND
2	input
3	GND
4	Output 1
5	GND
6	Output 2

Typical Performance Data (@25°C)

Frequency (MHz)	S12 (dB)	S13 (dB)	Insertion Loss (dB)	Isolation (dB)	Amplitude Balance (dB)	Phase (degree)	Return Loss(dB)		
							S11	S22	S33
1700	-3.26	-3.33	-0.17	-22.19	0.06	-0.28	-23.17	-32.41	-32.87
1725	-3.26	-3.33	-0.16	-22.98	0.06	-0.27	-23.95	-31.60	-31.27
1750	-3.26	-3.33	-0.16	-23.58	0.07	-0.29	-24.43	-30.57	-30.18
1775	-3.26	-3.33	-0.16	-24.50	0.07	-0.28	-25.01	-30.00	-30.19
1800	-3.27	-3.33	-0.16	-25.28	0.07	-0.28	-25.76	-29.58	-29.32
1825	-3.27	-3.34	-0.17	-25.97	0.07	-0.32	-25.68	-28.77	-27.88
1850	-3.27	-3.34	-0.17	-26.68	0.07	-0.32	-25.42	-27.73	-26.94
1875	-3.28	-3.35	-0.17	-27.21	0.08	-0.31	-25.45	-27.34	-26.75
1900	-3.28	-3.36	-0.18	-27.41	0.08	-0.27	-24.86	-26.70	-26.18
1925	-3.29	-3.37	-0.19	-27.19	0.08	-0.28	-23.33	-26.04	-25.05
1950	-3.30	-3.38	-0.20	-26.67	0.08	-0.31	-22.20	-25.09	-24.09
1975	-3.31	-3.39	-0.21	-26.08	0.07	-0.28	-21.48	-24.52	-23.73
2000	-3.32	-3.40	-0.21	-25.45	0.08	-0.30	-20.66	-23.98	-23.42
2025	-3.33	-3.41	-0.23	-24.62	0.08	-0.33	-19.54	-23.27	-22.52
2050	-3.35	-3.42	-0.24	-23.92	0.07	-0.30	-18.68	-22.63	-21.78
2075	-3.36	-3.44	-0.25	-23.23	0.07	-0.30	-18.13	-21.97	-21.41
2100	-3.37	-3.45	-0.26	-22.56	0.08	-0.32	-17.53	-21.42	-21.15
2125	-3.39	-3.47	-0.28	-21.80	0.08	-0.32	-16.65	-20.88	-20.33
2150	-3.41	-3.49	-0.30	-21.26	0.07	-0.29	-15.93	-20.32	-19.54
2175	-3.43	-3.51	-0.32	-20.73	0.08	-0.34	-15.45	-19.77	-19.23
2200	-3.45	-3.53	-0.34	-20.19	0.07	-0.37	-14.90	-19.16	-18.90


Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wen Yuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Typical Performance (-40°C, 25°C, 85°C, 125°C: 1700-2200 MHz)

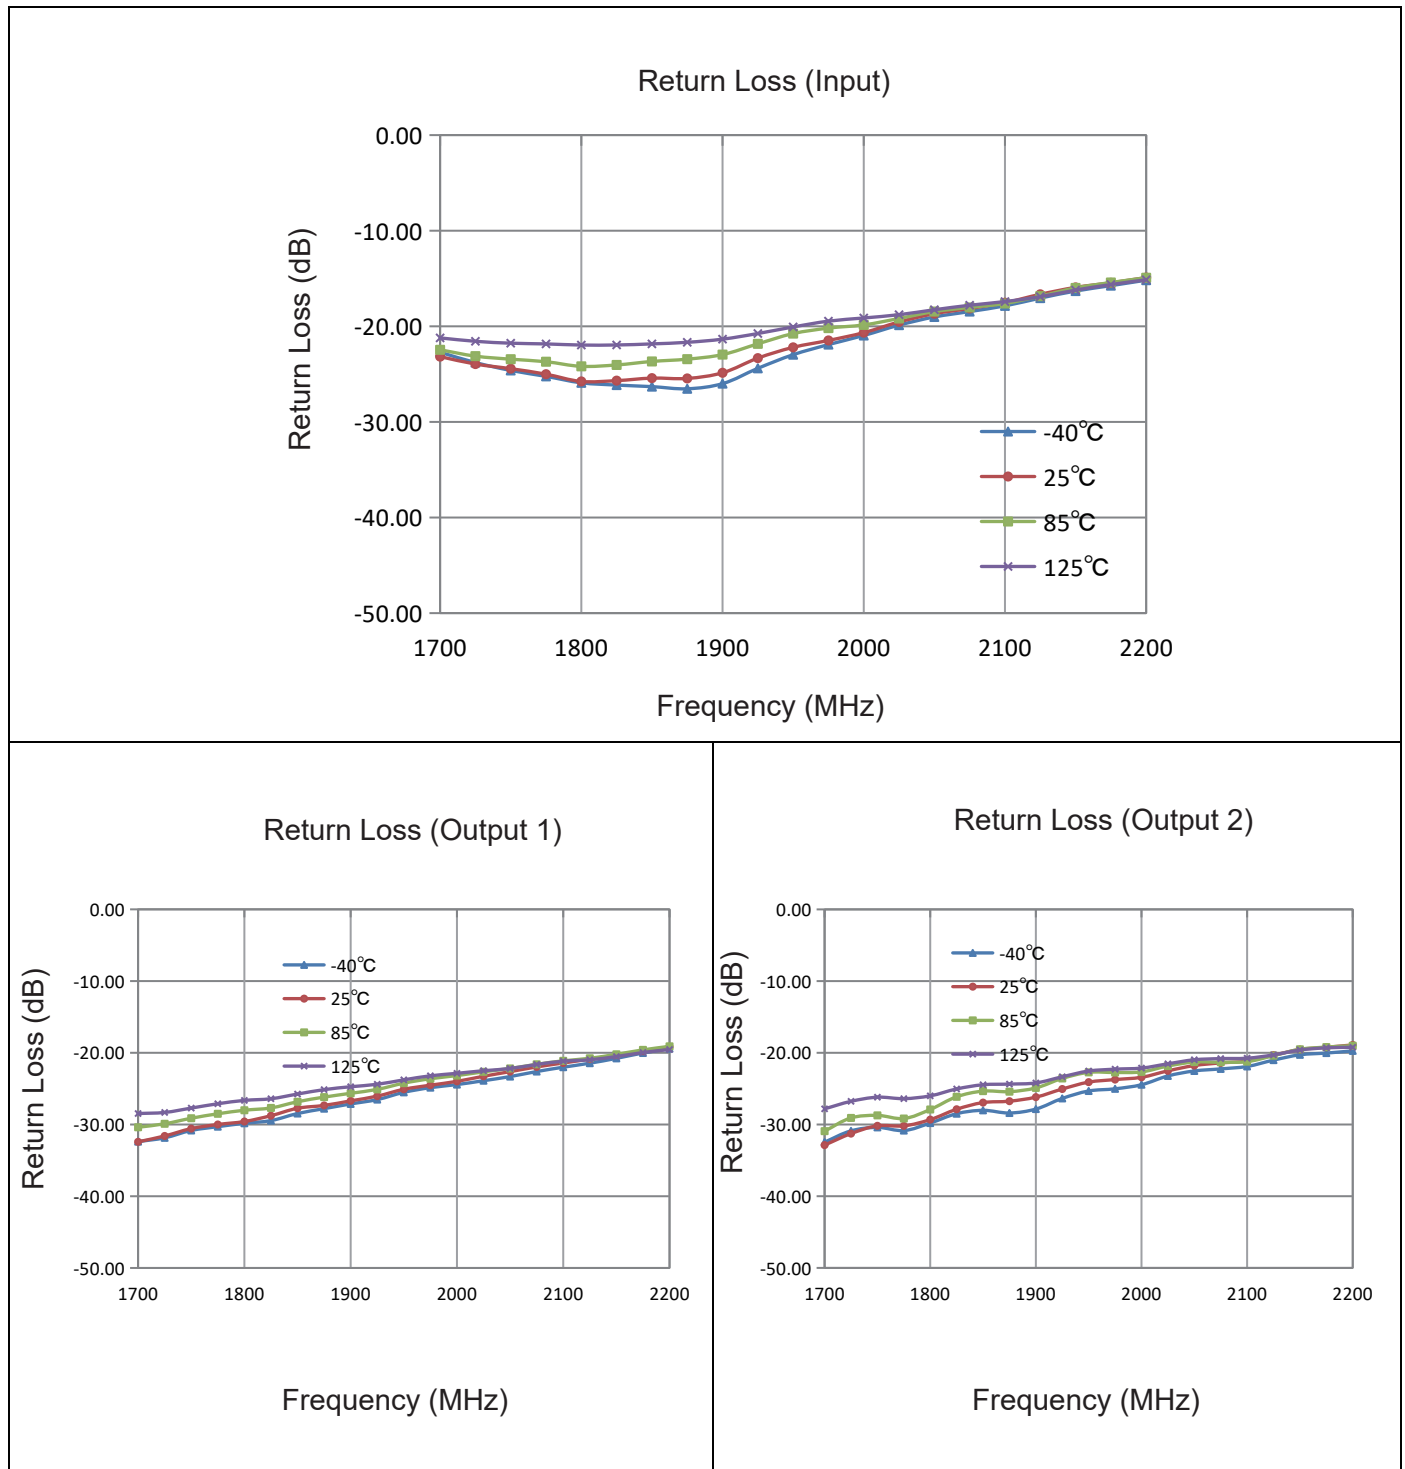


Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Typical Performance (-40°C, 25°C, 85°C, 125°C: 1700-2200 MHz)

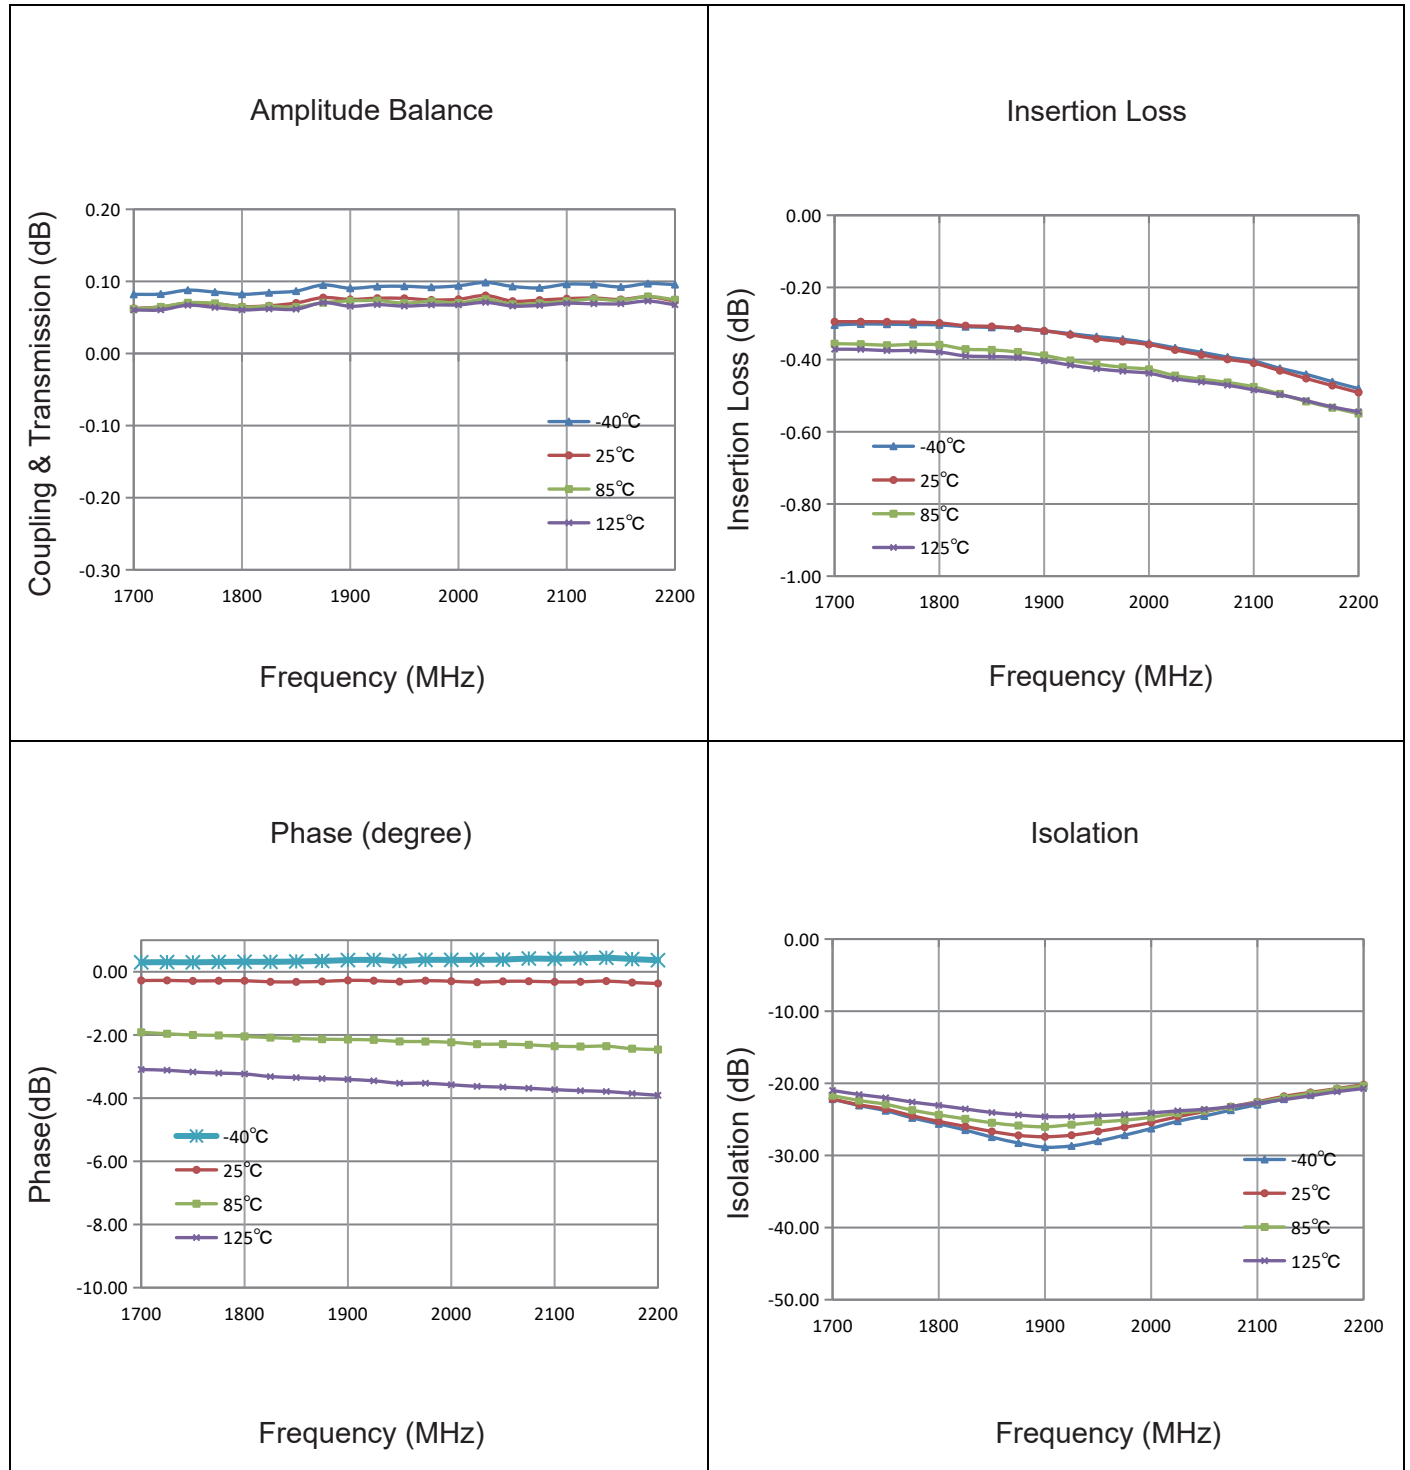

Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533


For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Mounting Configuration:

In order for surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.

An example of the PCB footprint used in the testing of these parts is shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances. In addition, since the PD19T03 is a Wilkinson power divider, an external 0603 100Ω resistor must be mounted in locations R1 as shown in the Figure below.


Pad Footprint w/ 0603 Resistor Locations

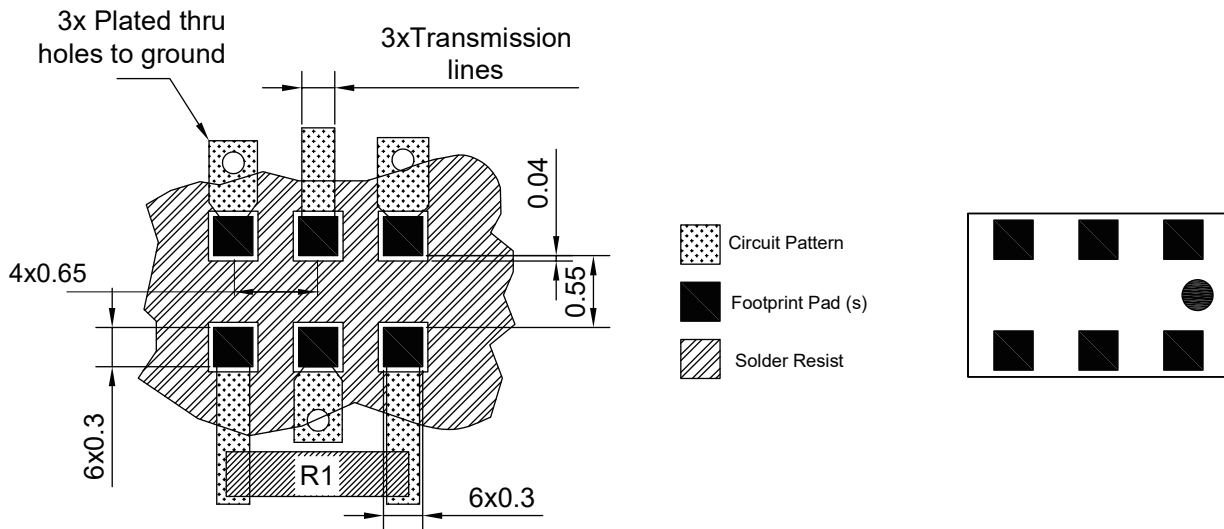

NOTE:

1. 50Ω line width is shown above designing.
2. Bottom side of the PCB is continuous ground plane.
3. All dimensions shown in mm [inch].

Reflow Profile

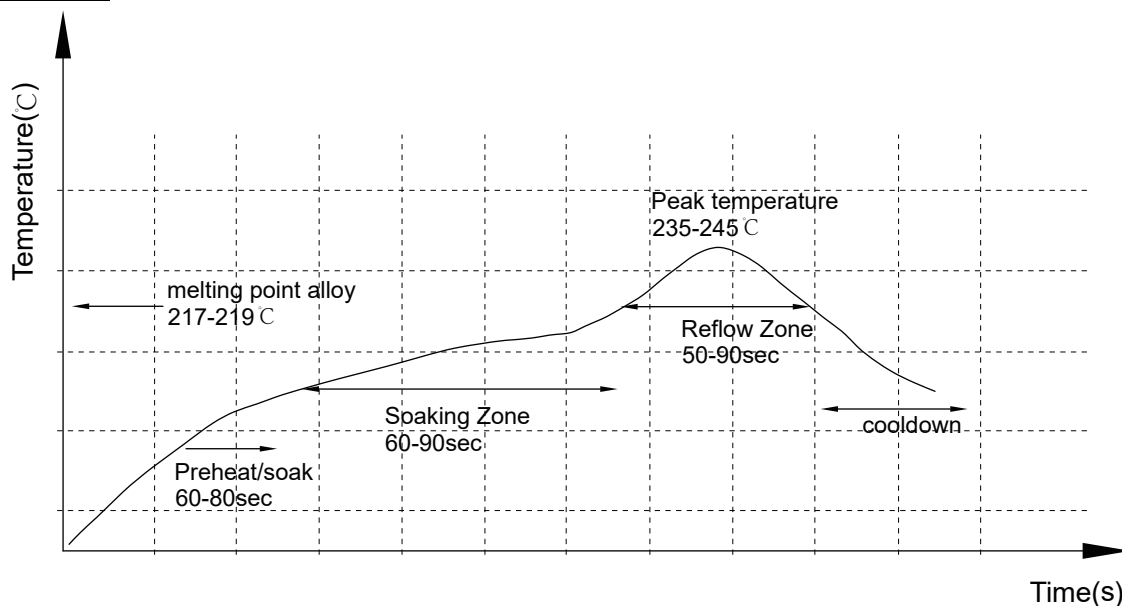


Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China


Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Reliability Test Flow

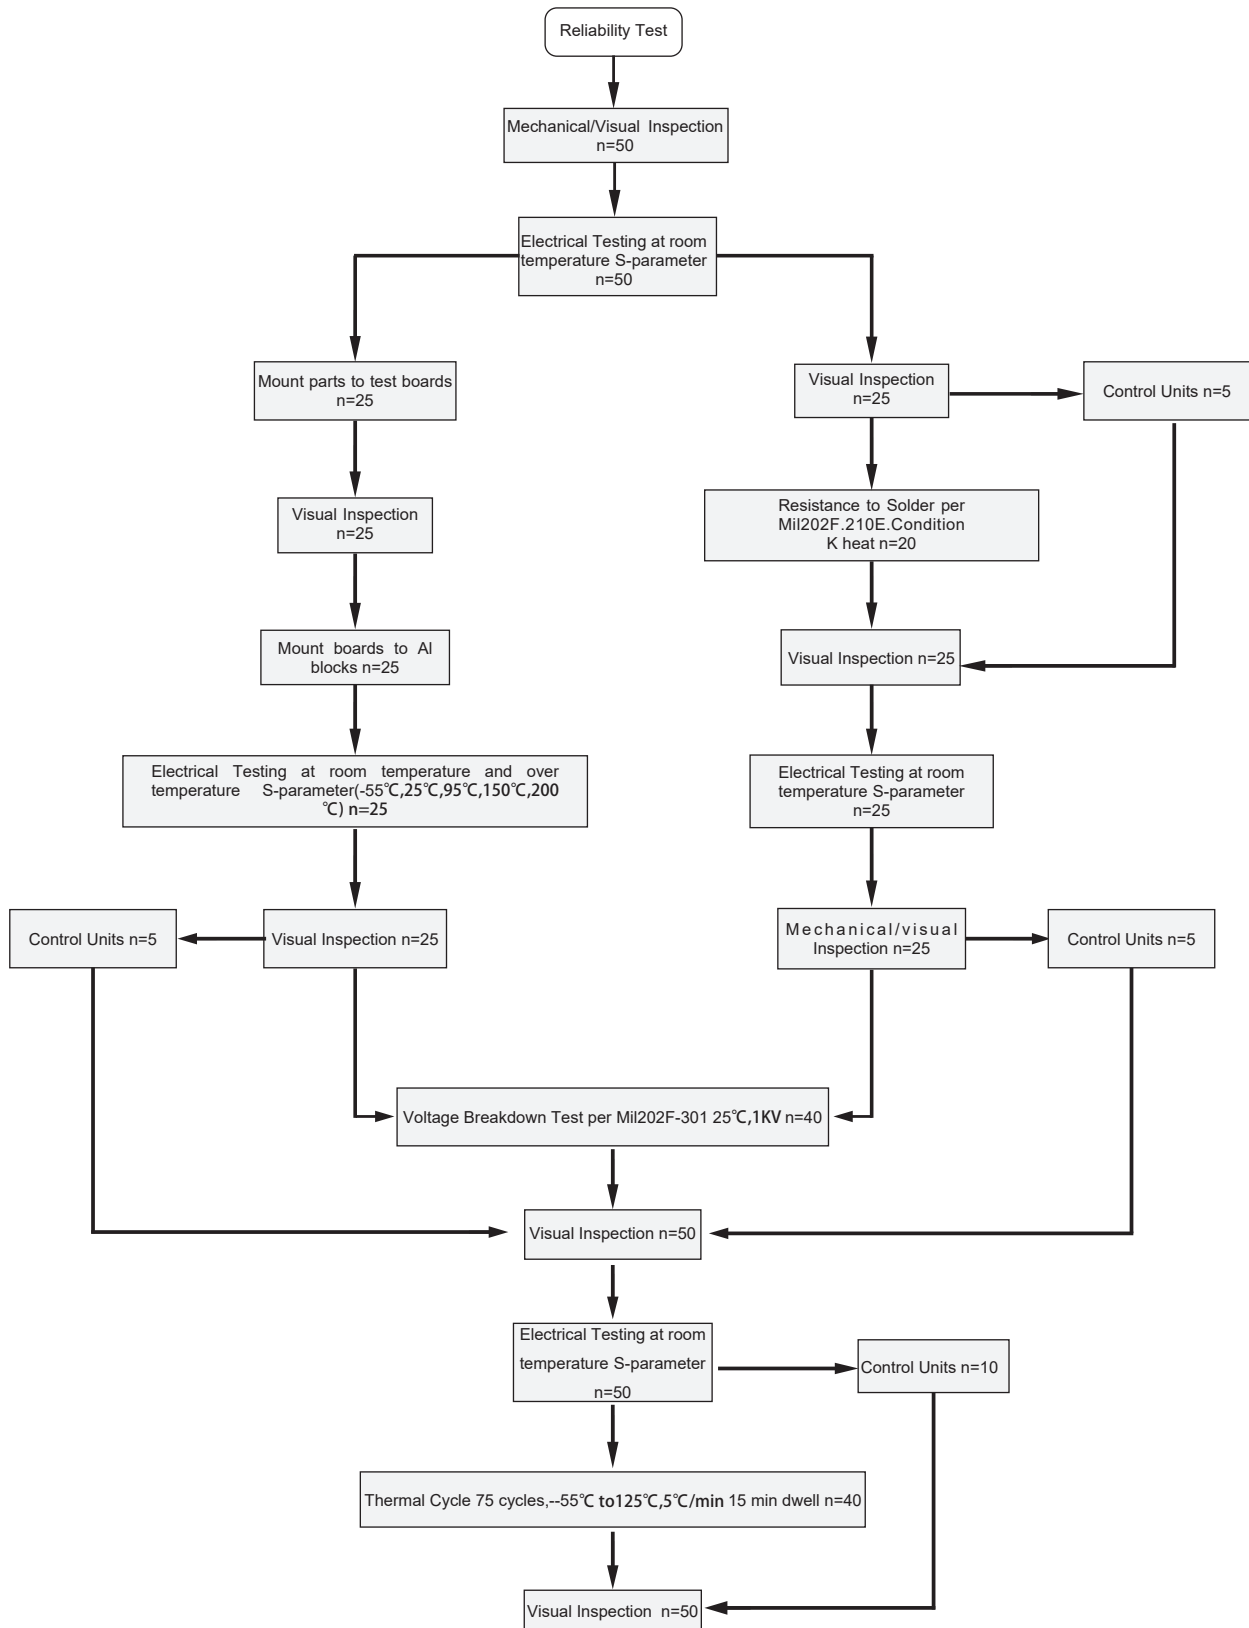


Reliability Test Flow

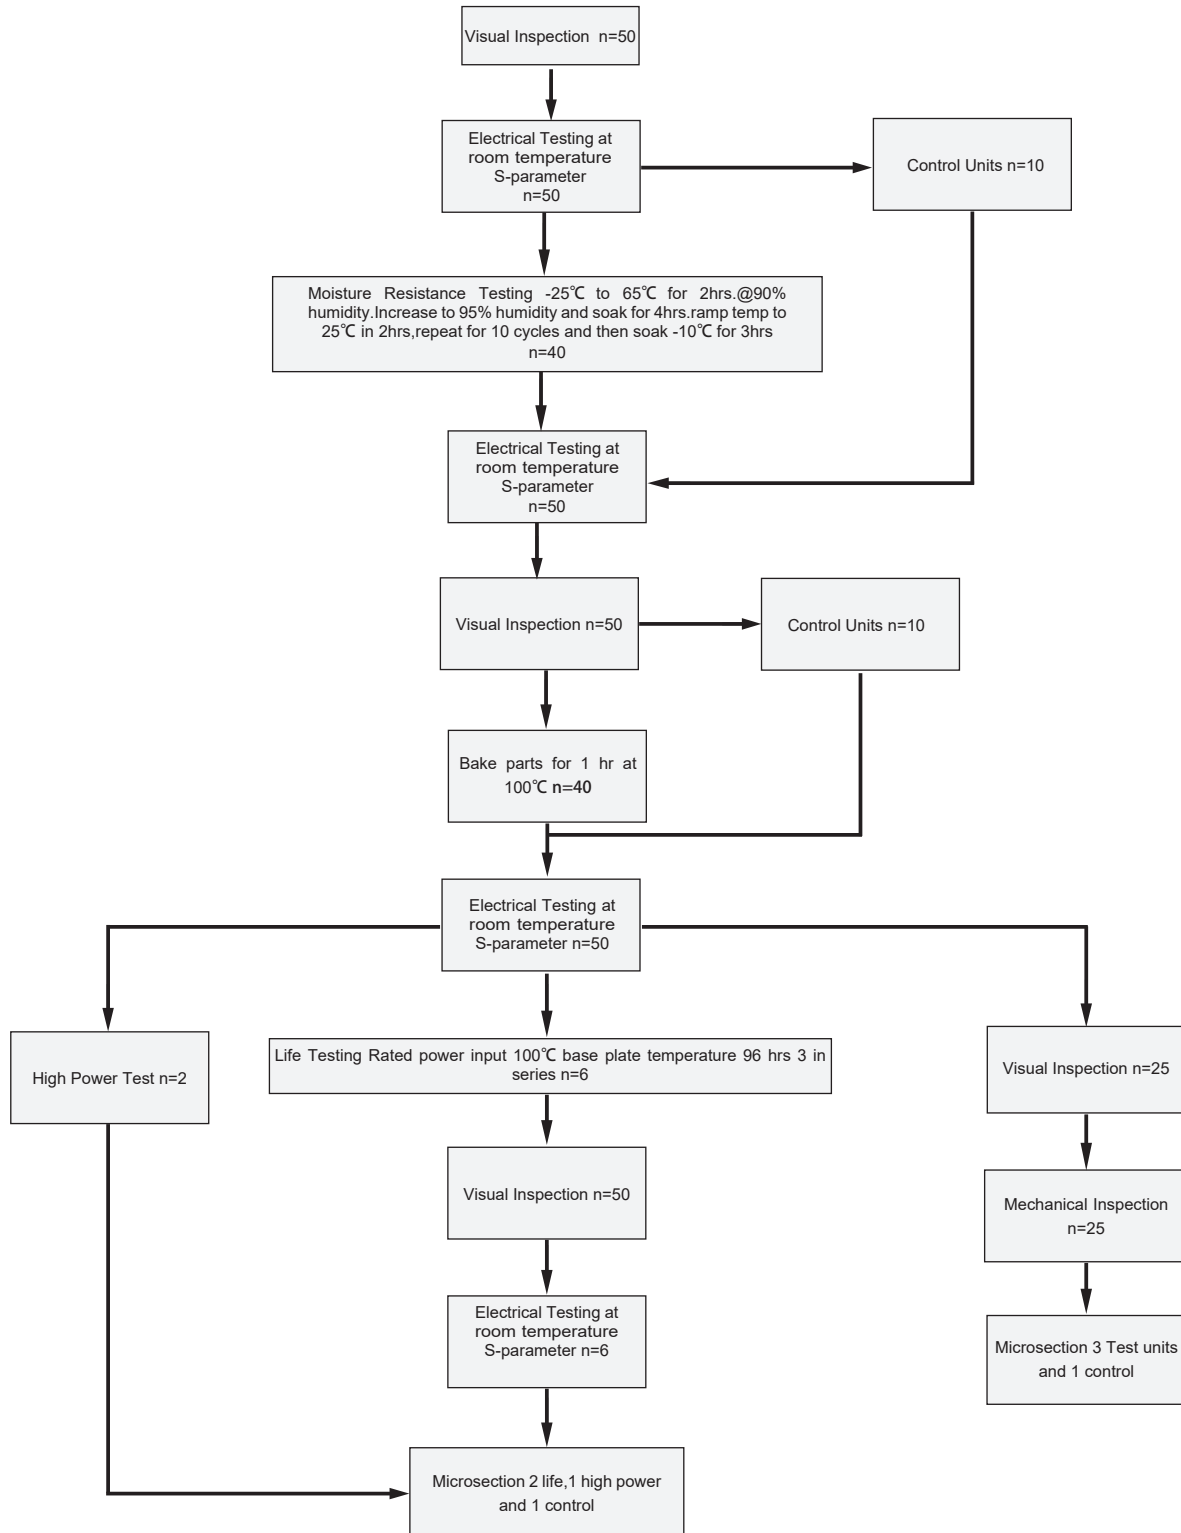

Tape and Reel Drawing


Feeding Direction

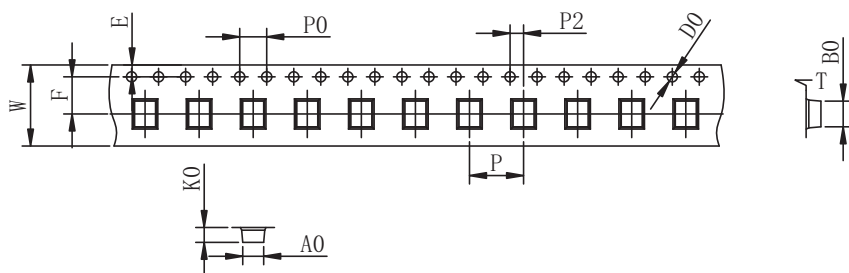


ITEM	W	A0	B0	K0	K1	P	F	E	D0	P0	P2	t	7"
DIM(mm)	8.0	1.45	2.30	1.00		4.0	3.5	1.75	1.5	4.0	2.0	0.2	P/R
TOLE	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.00	+0.10 -0.10	+0.10 -0.10	+0.05 -0.05	5000pcs

Notice:

- A. 10 Sprocket hole pitch cumulative tolerance is 0.2mm.
- B. Carrier camber shall be not more than 1mm per 100mm through a length of 250mm.
- C. All dimensions meet EIA-418-B requirements.
- D. A0 & B0 measured as indicated.
- E. K0 measured from a place on the inside bottom of the pocket to top surface of carrier.
- F. Material: PE 100
- G. Thickness: 0.20 ± 0.05 mm
- H. 5000 units (maximum) / T&R

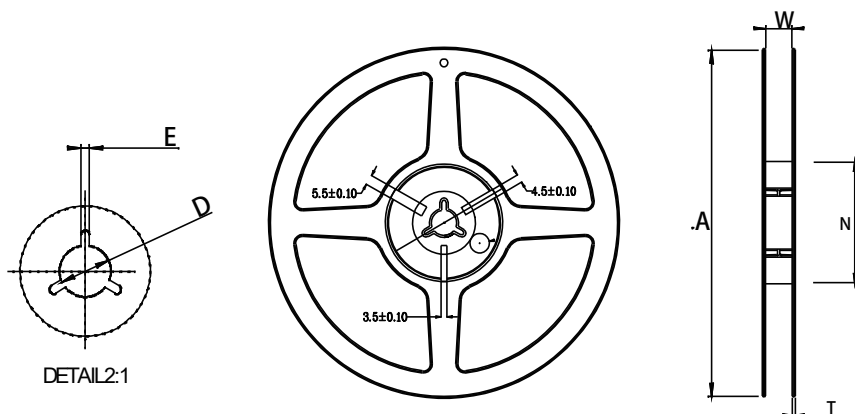

Symbol	Dimensions(mm)
W	9.0±0.4
A	180±0.3
N	60±0.3
T	1.4±0.2
E	3±0.5
D	25±0.8

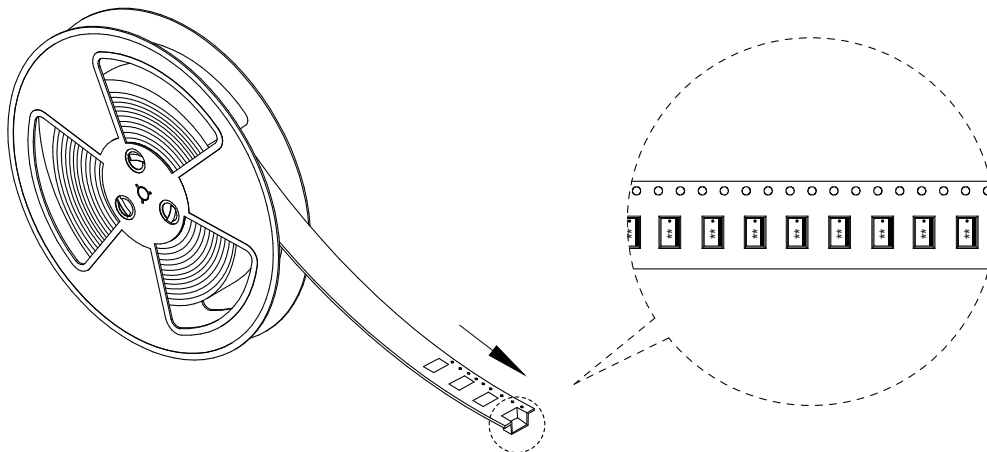

Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com