


DESCRIPTION

Yantel introduces its new high frequency surface mountable catalog resistive couplers. These couplers incorporate Yantel's high dielectric ceramic materials which provide small size and minimal performance variation over temperature. The components are well matched for monitoring incident and reflected power.

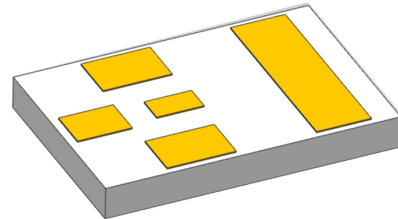

FEATURES

- Small Size
- Excellent Repeatability
- Surface Mountable
- Moisture Sensitivity Level: MSL1
- Frequency Stable over Temperature
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

Electrical Specifications at 25°C

Parameter	Specification
Frequency Range	DC~40GHz
Insertion Loss	≤ 3.0 dB
Return Loss	≥ 12
Coupling	20dB $\pm$ 3
Input Power	5W
Characteristic Impedance	50 Ω
Output Install	Welding/SMD
Package Size	1.52mm*2.24mm*0.26mm

Yantel Corporation


Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533


For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Typical Measured Performance

Coupling

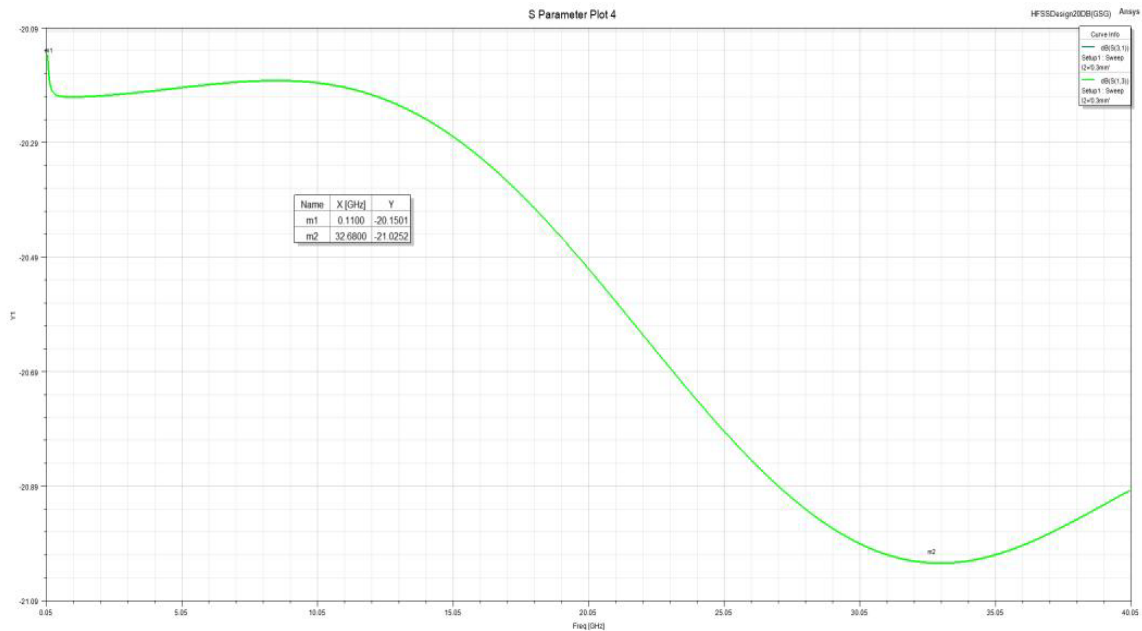

Return Loss

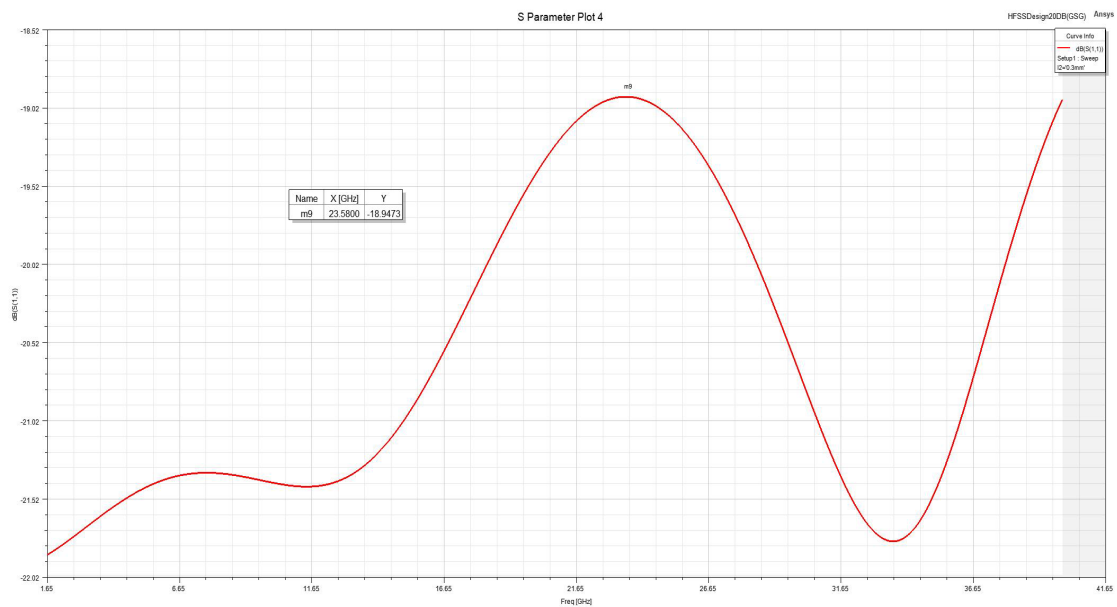


Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China


Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Insertion Loss

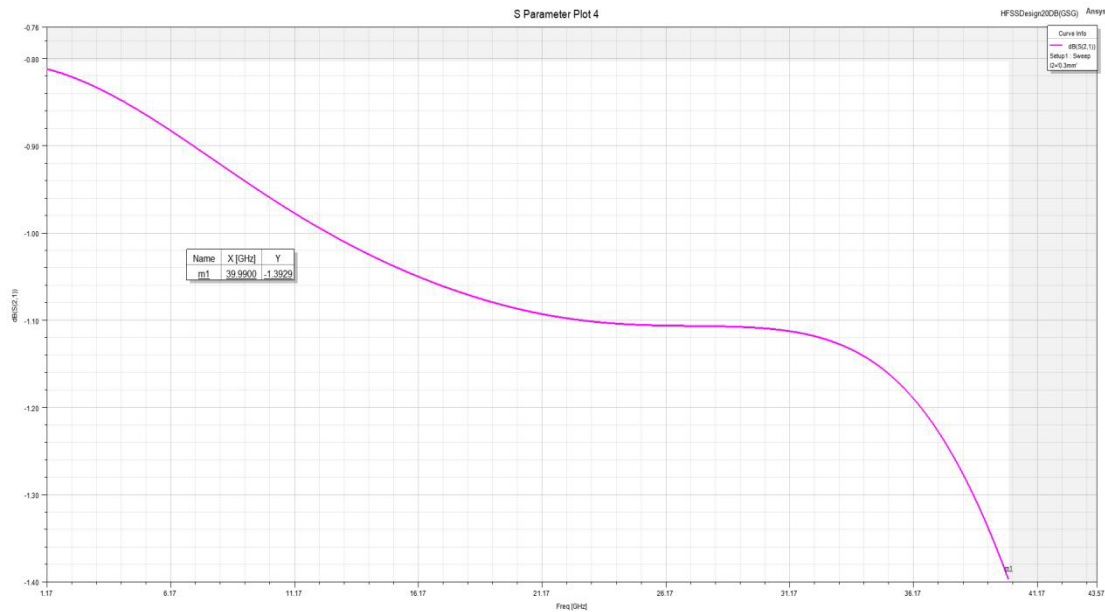

Mechanical Outline

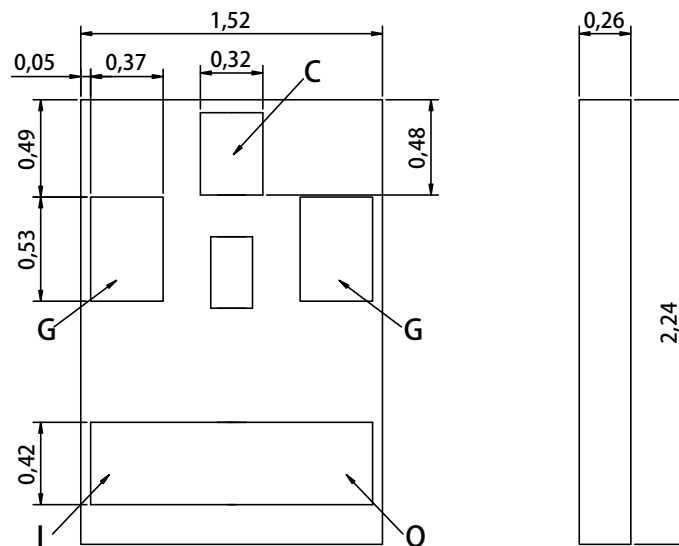


Unit	mm
Identification size	I:Input; O:OutPut; C:Couple; G:GND
Base material	Ceramics
Surface process	Gold plating

Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

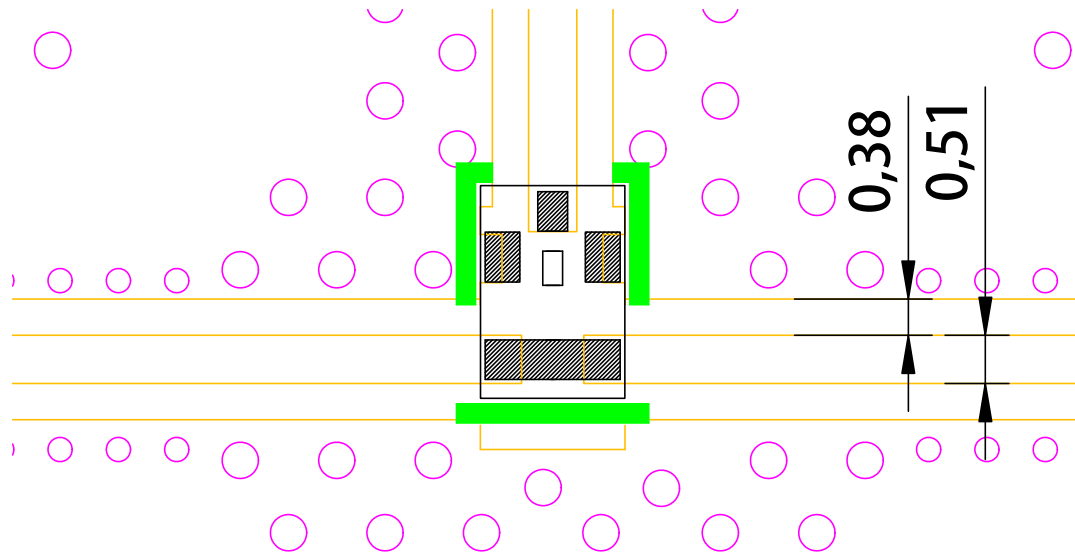Recommended PCB Layout

- 50 Ω trace dimensions are application specific.
- Ensure adequate grounding beneath the part.
- Trace feed locations can be horizontal, vertical, or angled.
- The board material model is RO4350B, Board Thickness: 10 mil / 0.254 mm, Copper Weight: 1 oz.

Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com